


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 16 RANGE 3
DATE: 8-25-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 6-13-04

IN. S.P.C. E ZONE NAD '83
NAME: 16032201
N: 508164.2600(m)
E: 54568.9439(m)

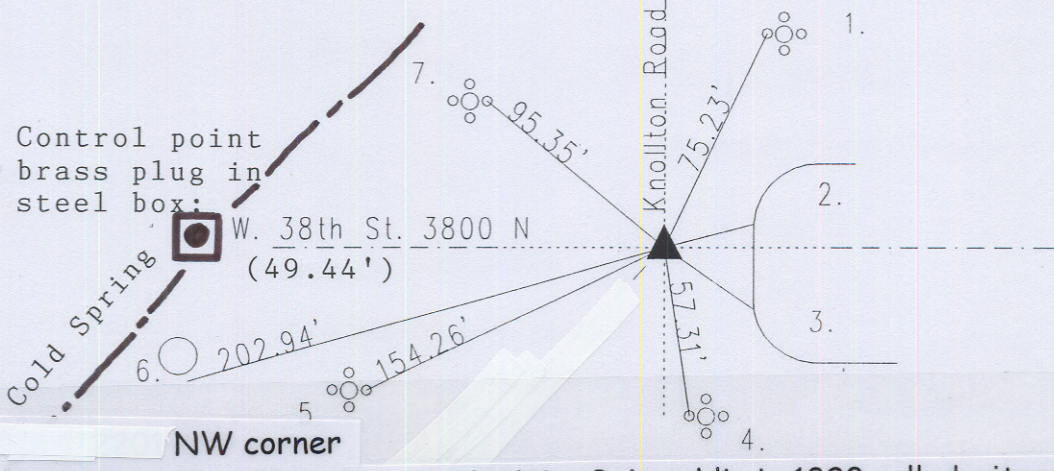

CORNER HISTORY: A survey by Wm. B. Laughlin in 1820 called witness: 10" beech N 78 E 23 links; 4" dogwood S 53 W 13 links per Marion County Atlas pg. 7. March 11, 1870 witness to this NE corner of 21-16-3 same as NW of 22-16-3 per O.W. Voorhis per Wayne Township Legal Survey Book 1 pg. 64 .Legal survey by Frank Unversaw 10-7-1955 called the corner per Washington Township Legal Survey Book pg. 165. Reference dated 9-16-55 by Monroe found railroad spike. Reference dated 11-27-62 by GW Schmidt found brass plug. Reference dated 1-22-63 by Burres, Jr. found brass plug. Reference dated 6-21-73 by Wilcoxon called found brass plug. Reference dated 12-3-75 by Miller called same. Reference dated 7-18-99 by Wilcoxon called same. Reference dated 12-14-00 IPL Bill Luecht did a survey to the point. Also, P.I. Cripe did a survey 9-7-00 on the Art Museum Job#930612-3080. Reference dated 6-13-04 by Wilcoxon called a brass plug. Reference dated 8-24-06 by Wilcoxon called set Harrison where the brass plug was per ties & GPS coordinates. No other points were recovered.

REF.	DISTANCE	DESCRIPTION
1.	75.23'	Cut 'x' W bolt of aluminum pole base
2.	8.22'	Mag nail w/bw in curb joint
3.	11.22'	Mag nail w/bw in curb joint of median
4.	57.31'	Cut 'x' in W-bolt of aluminum pole base
5.	154.26'	Cut 'x' F-bolt of aluminum pole base
6.	202.94'	Mag nail w/bw SF PwP#45-401 B 40"up
7.	95.35'	Cut 'x' F bolt of aluminum pole base